



S Series 650 785

Fast, high performance RIBs, great for long distances

Standard Features

Hypalon 2-tone blue and light grey tubes, with 6 grab handles, moulded lifeline holders, lifelines, wear patches, dual rubbing strake

Bow fairlead on GRP moulding with stainless steel cleat

Deep V hull, monocoque construction

Moulded deck with self-draining cockpit

Splashwell including drains, hull drains

Integral sculpted rear seat with large storage area

Bow eye, 2 transom U bolts, anchor eye

Underdeck stainless steel fuel tank: 235 litres in 650

280 litres in 785

Sports console with front seat, screen and stainless steel rail, cushion and back rest, hatch, removable dash panel

2 x 3-man jockey seats (785)

2 x 2-man jockey seats (650)

Bow seat with cushion and locker beneath

Steering wheel, helm

Owner's manual

Accessories

Navigator console - 785 only

Backrests for sculpted rear seat

Swing back helm seat

Bow sunbed

Bimini cover

Mooring cover

Boarding ladder

Boarding platform with telescopic ladder

3-way bolster helm seat

Deluxe 2-man wraparound helm seat with rear grab rail, fitted onto a stowage box

1-man, 2-man, 3-man jockey seats

A-frame with navigation lights


Teak decking

Hydraulic steering

650



785

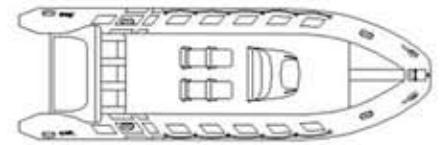

Technical Specifications

	650	785
Overall Length	6.60m	7.83m
Internal Length	5.55m	6.67m
Overall Width	2.50m	2.50m
Inside Width	1.58m	1.58m
Tube Diameter	0.46m	0.46m
Number of Air Chambers	5	5
Number of Persons	12	14
Maximum Payload	1350kg	1500kg
Boat Weight Std Spec	800kg	820kg
Maximum Power	200hp	300hp
Engine Shaft	XL	XL
Design Category	B	B
Boat Weight inc Engine/Rigging	1294kg	1398kg
Boat & Trailer Weight	1854kg	1958kg
Trailer Weight	560kg	560kg
Height on Trailer	2.43m	2.43m
Height of Boat	1.95m	1.95m
Engine Weight	278kg	280kg
Prop Size	21"	24"
Draft in Water at Rest	0.55m	0.55m
Max Speed	48knts	52knts

Ribeye carries out a continuous program of product improvement and safety awareness. Specifications are subject to change without notice, although all details are correct at the time of going to press. Ribeye products may be produced with a different trim level than originally specified. All dimensions are +/- 3%.

Please note that performance of your boat depends on engine size, propeller selection, trim settings, payload distribution and operating conditions. Refer to sections within this manual and within your engine owner's manual to obtain the best performance from your Ribeye.

Ribeye Ltd, Collingwood Road, Townstal, Dartmouth, Devon TQ6 9JY

E: sales@ribeye.co.uk T: 01803 832060 F: 01803 839090

Powered by  YAMAHA





Standard Rigging for S Series

- Control box flush side mount or top mount
- Ignition switch panel & lanyard
- Hydraulic steering
- Fuel filter & connector
- Chrome transom bracket
- Rigging grommets
- 4-Stroke oil 10w40 5ltrs
- Ultraflex ST cables
- TFXtreme remote control cables
- Battery & battery box
- Bilge pump
- Bilge pump switch
- Ribeye switch panel
- Hull bungs
- Engine nutlock
- Ribeye repair kit & hand pump

Trailers

Ribeye trailers are available for the full range of Ribeye boats, and are set up specifically to aid launch and recovery.

The following come as standard:

- Rod operated brakes
- Lighting board
- Multi-roller launch and recovery
- Hub & brake flush facility
- Hitch lock

Electronics

We fit Garmin as our chosen electronics. Fitted to the S Series is the GPSmap 4008 or 551s and the 100i VHF.

The GPSmap 4008 is a full multi-function display with an 8" VGA screen and capable of being used as a chartplotter, fishfinder and radar. Garmin's G2 Vision cartography unlocks the full potential of the 4008 giving navigation charts, fishing charts a 3D view both above and below water. Garmin's unique Auto Guidance route calculation gives an unrivalled ease of use. This product has full integration with the Garmin 100i VHF features.

Yamaha

Yamaha lead the world in high performance marine engines. Their range of four stroke outboards is the most complete line-up of engines offering performance, reliability and durability.

Engine models used in S Series Range:

- F150
- F200
- F225
- F250
- F300

