

TA

365 | 400 | 430 | 480

TA 480

Standard Features

Hypatex 2-tone white and light grey tubes with 4 grab handles and 6 fabric handles (4 fabric handles on 365), white epoxy powder coated heavy-duty aluminium hull and deck.

Anti-slip decktread, raised anchor locker with access hatch and mooring cleat.

4 inside grab handles, auto-bailing transom drains, 4 davit lifting points.

Double fixing point on bow, large diameter, multi-compartment buoyancy tubes.

Recessed inflation valves, bow cleat, heavy duty rubbing strake, foot pump.

Reinforced transoms to support up to 70hp outboard motor, maintenance kit.

Optional Extras

Mini double jockey console Weight 18kg

Single Jockey console Weight 32kg

Double Jockey console Weight 43kg

Deluxe console with helm seat, screen & rail, integral s/s fuel tank (43l) Weight 85kg


Standard console with helm seat, integral s/s fuel tank (35l) Weight 70kg

Lifting Sling

Thwart bag



TA RANGE

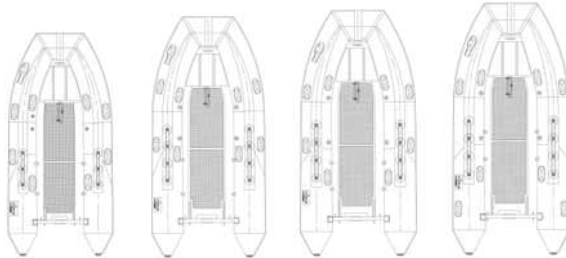

Technical Specifications:	TA 365	TA 400	TA 430	TA 480
Overall Length	3.65m	3.96m	4.27m	4.88m
Internal Length	2.62m	2.85m	3.15m	4.11m
Overall Width	1.65m	2.00m	2.00m	2.25m
Inside Width	0.73m	1.00m	1.00m	1.18m
Tube Diameter	47cm	47cm	47cm	48cm
Number of Air Chambers	3	3	4	5
Number of Persons	5	7	8	9
Maximum Payload	660kg	680kg	720kg	810kg
Boat only Weight	108kg	116kg	120kg	186kg
Maximum Power	40hp	40hp	50hp	70hp
Engine Shaft	L	L	L	L
Design Category	C	C	C	C
Max Engine Weight	91kg	91kg	110kg	118kg



TA 480



TA 365



RIBEYE T SERIES

ALUMINIUM HULL | TOUGH | LIGHT | EASY TO TRANSPORT

Lightweight Ribeye Tenders are ideally suitable for beaching roles, typical for long-term tender use. Such smaller boats are much more likely to be dragged onto beaches or slipways where gravel, shingle and hard surfaces can be less than friendly to GRP hulls, which can be prone to deep scratching and the wear and tear of frequent abrasion. Aluminium hulls will take the punishment year after year.

Ribeye aluminium Tenders are roomy, strong and robust, yet light and easy to transport. The smaller models can be transported easily on a roof rack or motorhome roof. All models can be davit hung, stowed on the swim platform or towed astern.

Because of their light weight they are a real alternative for those who may have chosen an inflatable in the past for getting to and from a larger boat but would prefer a hard hull.

Tiller steering is standard on all models but an attractive range of consoles can be fitted for use with higher hp for remote use.



For full details visit www.ribeye.co.uk or call us on +44 (0) 1803 832 060

Powered by



TL 240 | 260 | 280 | 310

TL 260

Standard Features


Hypatex 2-tone white and light grey tubes with 5 grab handles and 4 fabric handles (8 fabric handles on 310), white epoxy powder coated aluminium hull, removable plastic thwart seat, 2 inside handles for additional seat. Heavy duty rubbing strake and heavy duty keel rubbing strake. Removable lock-in rowlocks, aluminium oars, auto-bailing transom drains. Internal oar storage, 3 davit lifting points, maintenance kit, foot pump.

Optional Extras

Dinghy wheels (rated to 113 kg)
 Snap davit kits
 Lifting Sling
 Additional thwart seat
 Tiller extension
 Thwart bag
 Bow bag



TL RANGE

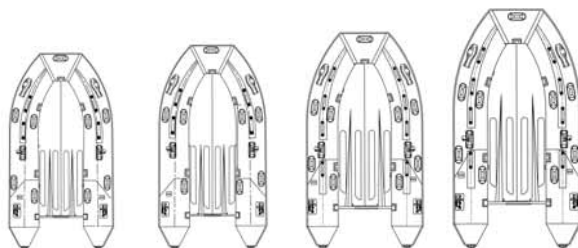

Technical Specifications	TL 240	TL 260	TL 280	TL 310
Overall Length	2.40m	2.60m	2.74m	3.10m
Internal Length	1.61m	1.75m	1.89m	2.15m
Overall Width	1.32m	1.42m	1.50m	1.65m
Inside Width	0.58m	0.58m	0.66m	0.73m
Tube Diameter	32cm	39cm	39cm	45cm
Number of Air Chambers	2	2	2	3
Number of Persons	3	3+1	4	4+1
Maximum Payload	270kg	360kg	450kg	540kg
Boat only Weight	29kg	33kg	35kg	43kg
Maximum Power	4hp	6hp	8hp	9.9hp
Engine Shaft	S	S	S	S
Design Category	C	C	C	C
Max Engine Weight	27kg	27kg	37kg	42kg



TL 260



TL 260

TS

TS 370

280 | 310 | 350 | 370 | 400 | 430 | 480

Standard Features

Hypatex 2-tone white and light grey tubes with 5 grab handles and 6 fabric handles (4 fabric handles on 280), white epoxy powder coated aluminium hull and deck.
 Removable thwart seat, removable lock-in rowlocks.
 Heavy duty rubbing strake & heavy duty keel rubbing strake, maintenance kit, foot pump.
 2 inside handles for additional seat, aluminium oars, auto-bailing transom drains.
 Unique zip bow dodger, internal oar storage, 3 davit lifting points, 3-point towing.
 Integral raised floor including fuel tank securing strap, double fixing point on bow.

Optional Extras


Snap davit kits (rated to 60kg)
 Lifting Sling
 Mini single jockey console Weight 15kg
 Mini double jockey console Weight 18kg
 Additional thwart seat
 Tiller extension
 Thwart bag



TS 310



TS RANGE

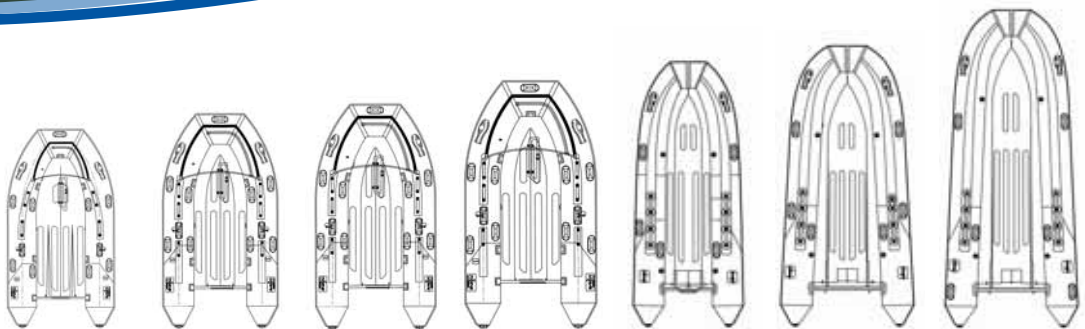

Technical Specifications	TS 280	TS 310	TS 350	TS 370	TS400	TS430	TS480
Overall Length	2.74m	3.10m	3.48m	3.70m	4.00m	4.27m	4.83m
Internal Length	1.89m	2.15m	2.47m	2.67m	3.05m	3.30m	3.85m
Overall Width	1.50m	1.65m	1.65m	1.65m	1.66m	2.00m	2.00m
Inside Width	0.66m	0.73m	0.73m	0.73m	0.75m	1.00m	1.00m
Tube Diameter	39cm	45cm	45cm	45cm	45cm	47cm	47cm
Number of Air Chambers	2	3	3	3	3	4	5
Number of Persons	4	4+1	5	6	7	8	9
Maximum Payload	450kg	540kg	630kg	660kg	680kg	720kg	810kg
Boat only Weight	45kg	55kg	58kg	62kg	76kg	105kg	130kg
Maximum Power	9.9hp	15hp	20hp	20hp	20hp	40hp	50hp
Engine Shaft	S	S	S	S	S	L	L
Design Category	C	C	C	C	C	C	C
Max Engine Weight	42kg	53kg	59kg	59kg	59kg	91kg	110kg